

Overview

The latest 1P rack server, HP ProLiant DL320e Gen8 Server series, is a new entry level rack-optimized platform, ideal for singleapplication IT infrastructure, web and edge-of-network applications. The ProLiant DL320e Gen8 Server is not only affordable but is more powerful by enabling powerful quad-core processor computing performance with larger memory & storage capacity, all in a small package.

The DL320e Gen8 supports the latest technology, such as Intel[®] Xeon[®] E3, Core i3 and Pentium processors, PCI-e Gen3, DDR3 1600MHz memory, up to 12TB internal storage, RAID solution as well as High Efficiency Hot Plug Redundant Power Supply Kit.

HP ProLiant DL320e Gen8 Server series supports HP iLO Management Engine, a complete set of embedded management features supporting the complete lifecycle of the server, from initial deployment, through ongoing management, to service alerting and remote support.

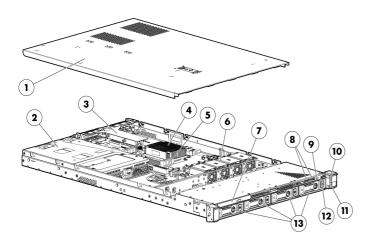



Front View:

- 1. Access Panel
- 2. Power Supply
- 3. PCI Riser Cage
- 4. Processor
- 5. DIMMs
- 6. Fans
- 7. Optical drive
- 8. 2 USB Connectors
- 9. UID LED button
- 10. Health LED
- 11. NIC status LED
- 12. Power On/Standby button and LED
- 13. Hard Drive Bays

Rear View:

- 1. Expansion slot 2, PCIe x16
- 2. Expansion slot 1, PCIe x8
- 3. Power Supply 2
- 4. Power Supply 1
- 5. Dedicated iLO port
- 6. UID LED button
- 7. Serial Connector
- 8. Video Connector
- 9. USB Connectors
- 10. NIC Connector 1
- 11. USB Connectors
- 12. NIC Connector 2



Standard Features

Processor	Entry Processors				
One of the following depending on Model	Intel® Pentium® G630 (2.7GHz/2-core/3MB/65W) Processor NOTE: Intel ®Pentium® G630 processor, performance for 1600MHz memory is clocked down to 1066MHz.				
	Intel® Pentium® G2120 (3.1GHz/2-core/3MB/55W) Processor NOTE: Intel® Pentium® G2120 Processor supports up to 1600MHz DDR3 memory speeds.				
	Intel® Pentium® G2100T (2.6GHz/2-core/3MB/35W) Processor NOTE: Intel® Pentium® G2100T Processor supports up to 1600MHz DDR3 memory speeds.				
	Base Processors NOTE: All support up to1600MHz DDR3 memory speeds.				
	Intel® Core™ i3-3220T (2.8GHz/2-core/3MB/35W, HT) Processor				
	Intel® Core™ i3-3240 (3.4GHz/2-core/3MB/55W, HT) Processor				
	Performance Processors				
	NOTE: All support up to 1600MHz DDR3 memory speeds. Intel® Xeon® E3-1220Lv2 (2.3GHz/2-core/3MB/17W, HT)				
	Intel® Xeon® E3-1220v2 (3.1GHz/4-core/8MB/69W) Intel® Xeon® E3-1230v2 (3.3GHz/4-core/8MB/69W, HT) Intel® Xeon® E3-1240v2 (3.4GHz/4-core/8MB/69W, HT)				
	Intel® Xeon® E3-1270v2 (3.5GHz/4-core/8MB/69W, HT)				
	Intel® Xeon® E3-1290v2 (3.7GHz/4-core/8MB/87W, HT)				
	NOTE: HT indicates that the processor model supports Intel [®] /Hyper-Threading Technology (Depends on the processor).				
	NOTE: DDR3 speed is the maximum memory speed of the processor. Actual memory speed may depend or the quantity and type of DIMMs and CPU installed (options for 1600, 1333, 1066MHz).				
Cache Memory	8MB (1×8MB) Level 3				
One of the following	NOTE: For Quad-core processors.				
depending on Model	3MB (1x3MB) Level 3				
	NOTE: For Dual-core processors.				
Chipset	Intel® C204 Series Chipset				
	NOTE: For more information regarding Intel [®] chipsets, please see the following URL: http://www.intel.com/products/server/chipsets/.				



Standard Features			
Upgradeability	Up to 8 bay SFF Hot plug D 1 PCIe 2.0 expansion slot	ole for higher Memory capacity Drive Cage; Or 4 bay LFF Hot plug or Non hot plug Drive Cages itional communications and storage expansion (depends on processor)	
On System Management Processor	HP iLO (Firmware: HP iLO 4) NOTE: For more information, visit: http://www.hp.com/go/ilo.		
Memory Protection	ECC		
Memory One of the following depending on Model	Gen8 Server. NOTE: To realize the perforrequired. For additional in http://h18000.www1.hp.o NOTE: Depending on the r 1600MHz, 1333MHz, or 10	HP SmartMemory Unbuffered (UDIMM) 4 DIMMs (2 Channels/ 2 DIMMs per channel) 2GB (1 x 2GB) UDIMM PC3-12800E (1600MHz) 4GB (1 x 4GB) UDIMM PC3-12800E (1600MHz) 8GB (2 x 4GB) UDIMM PC3-12800E (1600MHz) 32GB (4 x 8GB@1600MHz) revious generation servers are not fully compatible with the HP ProLiant DL320e prmance memory capabilities listed in this document, HP SmartMemory is formation, please see the HP SmartMemory QuickSpecs at: com/products/quickspecs/14225_na/14225_na.html memory configuration and processor model, the memory speed may run at 066MHz. Please see Memory Population Table or the Online Memory w.hp.com/g0/ddr3memory-configurator.	
Network Controller		30i Adapter .320e Gen8 server has an embedded dual-port network adapter . The server can various networking products	



Standard Features

Expansion Slots	Expansion Slots #	Technology	Bus Width*	Connector Width	Form Factor	Notes		
	1	PCIe 2.0	x4	x8	Low profile slot			
	2	PCIe 3.0	x16	x16	Half-length, full- height slot			
		*Indicates the number of physical electrical lanes running to the connector. NOTE: PCIe 3.0 support with Intel Xeon E3-1200v2 family only.						
HP Server ROM		ne flash process sta			rate Signing Service. T ming and preventing n			
	passed to the cu	HP ROM provides for essential initialization and validation of hardware components before control is passed to the customer-installed operating system. The ROM also provides the capability of booting from various fixed media (HDD, CD-ROM) and removable media (USB), to continue operation to the operating system.						
	progress via an a phase of hardwa	ttached monitor. If re initialization, sui se configuration or	configuration o table messages	r hardware errors are now displaye	allow monitoring of in are discovered during d on the connected me Integrated Managem	g this early onitor.		
	HP's ProLiant ROM is used to configure the following:							
	System mSystem ha	and chipset status emory, memory ma Irdware configurati -specific BIOS config	p, and memory on (Integrated P	CI devices and op	tional PCIe cards). d Setup Utility (RBSU).			
	NOTE: For furthe www.hp.com/su		se refer to HP's	RBSU (ROM based	setup utility) user gu	ide:		



Standard Features

Storage Controller One of the following depending on Model	Entry Models (Non hot plug)	HP Dynamic Smart Array B120i Controller NOTE: Supports 3.0Gb/s SATA. NOTE: Supports RAID 0/1/10 only. It does not have FBWC support so cannot support advanced RAID (5 onwards). For FBWC, a standup Smart Array Controller card must be configured.		
	Base Models (Hot plug)	HP Dynamic Smart Array B120i Controller NOTE: Supports 3.0Gb/s SATA. NOTE: Supports RAID 0/1/10 only. It does not have FBWC support so cannot support advanced RAID (5 onwards). For FBWC, a standup Smart Array Controller card must be configured.		
	Performance Models (Hot plug)	HP Smart Array P222/512MB FBWC controller NOTE: P222 can support RAID 0/1/10/5/50. More advanced options available with Smart Array Advanced Pack 2.0.		
	 NOTE: The DL320e Gen8 can support other advanced controllers as well, depending on model and configuration NOTE: For set up instructions for HP Smart Array B120i SATA Controller please refer to the HP ProLiant DL300 series server user guide. NOTE: For general information about HP Smart Array B120i SATA RAID Controller, please visit: http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers //dynamicsmartarray/index.html 			
Internal Storage Devices	Diskette Drive	None		
Internal Storage Devices	Diskette Drive Optical Drive	None Optional		
Internal Storage Devices				
Internal Storage Devices	Optical Drive Hard Drives	Optional		
Internal Storage Devices	Optical Drive Hard Drives One of the following	Optional DVD-ROM, DVD-RW		
Internal Storage Devices	Optical Drive Hard Drives	Optional DVD-ROM, DVD-RW None ship standard (Base Models and Performance Models)		



Standard Features						
Maximum Internal	Hot Plug SFF SAS	9.6TB	8 x 1.2TB			
Storage	Hot Plug SFF SATA	8.0TB	8 x 1TB			
	Hot Plug LFF SAS	16.0TB	4 x 4TB			
	Hot Plug LFF SATA	16.0TB	4 x 4TB			
	Hot Plug SFF SAS SSD	6.4TB	8 x 800GB			
	Hot Plug SFF SATA SSD	6.4TB	8 x 800GB			
	Hot Plug LFF SATA SSD	3.2TB	4 × 800GB			
	Non-Hot Plug LFF SATA	12.0 TB	4 x 3TB			
	Non-Hot Plug LFF SAS	2.4TB	4 x 600GB			
Interfaces	Serial	1				
	Video	1 Rear standard	video			
	HP iLO Remote Management Network Po	LO Remote 1Gb Dedicated				
	SD slot	1 Internal NOTE: The SD slot is not a hot-pluggable device. Customers should not attempt to plug an SD card into the SD slot while the server is powered.				
	USB 2.0 Ports	7 total: 4 rear, 2	front, 1 internal (Optional)			
Industry Standard	ACPI 2.0b Compliant					
Compliance	PCIe 3.0					
	PXE Support					
	WOL Support					
	USB 2.0 Compliant					
Server Power Cords	All Pre-configured Models servers ship with a high voltage server to PDU power cord. NOTE: HP ProLiant DL servers no longer ship standard with a 12-foot NEMA 5-15P to C13 power cords (227099-001) that allow connection to 110V US wall outlets in a home or office. ProLiant DL servers are primarily connected to PDU's in data center racks so they now ship standard with only a PDU 6-foot C-14 to C13 power cord (142258-001). If a user wishes to power a ProLiant DL server using a110V receptacle (NEMA-15), the 12-foot NEMA 5-15 to C13 power cord must be ordered separately. See Power Cords section for Worldwide Power Cord options.					
Power Specifications			he HP Power Advisor which is available via the online tool ergy-efficient or www.hp.com/go/hppoweradvisor.			
			ntent for supported power supplies can be found at: kspecs/14209_div/14209_div.html			



Standard Features

	NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server including how to purchase from HP, please visit our OS Support Site at: http://www.hp.com/go/ossupport and our driver download page: http://www.hp.com/support/DL320eGen8.				
Operating Systems and Virtualization Software Support for ProLiant Servers	Microsoft Windows Server Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Server (SLES) VMware				
System Fans	4 fan modules ship standard, non-redundant				
	NOTE: Power Specification and Technical Content for supported power supplies can be found at: http://h18000.www1.hp.com/products/quickspecs/14209_na/14209_na.html				
	Redundant Power: Optional (1+1 or n+n redundant) power supplies can be purchased through power supply option kits (see Power Supplies for part numbers).				
	NOTE: The 80 PLUS program is a unique forum that unites electric utilities, the computer industry, and consumers in an effort to bring energy efficient technology solutions to the marketplace. 80 Plus independently tests power supply efficiency and publicly posts the results on 80Plus.org.				
	It is highly recommended that you use the HP Power Advisor in defining the "Right-Size" power supply for your needs. HP Power Advisor can be accessed at: www.hp.com/go/hppoweradvisor .				
	HP CS Platinum Plus power supplies are required when enabling HP's Intelligent Power Discovery (IPD) solution. IPD is the first technology to create an automated, energy-aware network between IT systems and facilities. This allows your company to reclaim millions of dollars in wasted power capacity and downtime costs across data centers. For more information on HP's IPD solution, go to www.hp.com/go/ipd.				
	NOTE: Mixing of power supplies (for instance Common Slot Platinum Plus power supplies and Common Slot Gold power supplies) in the same server is not supported. All power supplies must be of the same output and efficiency rating. If non-matched power supplies are inserted you will get errors and operation will fail.				
	HP's Common Slot (CS) power supplies allow for commonality of power supplies across a wide range of ProLiant and Integrity servers, as well as HP Storage solutions, and are designed to provide the highest power supply efficiency without degrading system performance. HP CS power supplies are tested by the Electric Power Research Institute (EPRI) and certified through the ECOS 80 Plus power supply program. The 460W HP CS power supply option provides an efficiency rating of up to 94%. All HP Common Slot power sources are UL, CE Mark Compliant, hot-plug and support redundant configurations.				
Common Slot Power Supply	 NOTE: The default power supply for DL320e Gen8 server is a 350W Non Hot Plug, Non Redundant (ATX) power supply with 85% efficiency. NOTE: To choose a Redundant Common Slot Power Supply option for the DL320e Gen8 server, a Factory Integrated Model must be chosen, beginning with a CTO server. Also, an HP DL320e Gen8 RPS Enablement FIO Kit (675451-B21) is required. 				



Standard Features

Graphics	Integrated Matrox G200 • 1280 x 1024 (32 t • 1920 x 1200 (16 t HP iLO 4 On System Man • 16 MB Flash • 256 MB DDR 3 wit	(qqq (qqq
Form Factor One of the following depending on Model	4 LFF Drive Bay Version:	7.11" (43.46cm) Width x 27.5" (69.90cm) Length
On System Management	HP iLO Management Engine	 HP iLO Management Engine is a comprehensive set of embedded management features supporting the complete lifecycle of the server, from initial deployment, through ongoing management, to service alerting and remote support. HP iLO Management Engine comes standard on all HP ProLiant Gen8 servers. The HP iLO Management Engine portfolio includes: HP iLO: The HP iLO (Integrated Lights-Out) management processor is the core foundation for the HP iLO Management Engine HP Agentless Management: Provides built in server health monitoring and alerting capability without OS agents, that starts working the moment a power cord and an Ethernet cable are connected. HP Active Health System: Always on, continuous monitoring for increased stability and shorter downtimes; 100% configuration history; Health and service alerts and easy export and upload to Service and Support. HP Intelligent Provisioning: Lets customers provision and configure a single server without any separate media. No more SmartStart CDs or Smart Update Firmware DVD are needed. Press the F10 key during the ProLiant Gen8 server boot process (also known as power on self test or POST). Please go to the Intelligent Provisioning for additional information and to view usage videos. Use the Service Pack for ProLiant (SPP) at www.hp.com/go/spp to get firmware and software updates. HP iLO Mobile App: Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: www.hp.com/go/intelligent

NOTE: For more information, visit: http://www.hp.com/go/ilo or HP iLO

Standard Features

Management Engine technologies whitepaper

HP Insight Management	HP Service Pack for ProLiant (SPP)	HP Service Pack for ProLiant (SPP) and HP Smart Update Manager (HP SUM) version 5 provide a new, comprehensive approach to firmware and system software maintenance. Together they provide better operating stability and ensure maximum uptime. The SPP will be updated at a predictable cadence, typically coinciding with new HP server hardware launches. By enabling all firmware to be updated online and integrating firmware and system software updates in one operation HP SUM and the SPP offer faster updates of individual servers and dramatically faster updates of entire BladeSystem enclosures. Further improving system uptime and stability is the fact that HP provides 12 months of support on each Service Pack for ProLiant. The user experience around HP SUM and the SPP has been improved in several ways, starting with the web download. A single web page provides access to a single download containing both the latest version of HP SUM version 5 and the latest SPP. Optional smaller subsets with only specific types of servers or specific operating systems are offered to save on download time. The HP SUM application has been re-written to provide a more straightforward, intuitive user interface that guides the user through the steps of discovery, analyses and update, providing comprehensive information on available in reports. By providing the option of multiple local or shared repositories which can be easily updated from hp.com, HP SUM provides the tools to optimize stability and consistency throughout the company. While HP SUM and the SPP will recommend the combinations of firmware and system software that HP has found to be the best practice, the application gives customers the flexibility to set their own specific baseline.
		downloaded from www.hp.com/go/spp/download. More information can be found: www.hp.com/go/spp and http://www.hp.com/go/hpsum
Security	Power-on password Administrator's password	



Standard Features

Warranty

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html



Optional Features

HP Insight management software	HP Insight Control	HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. HP Insight Control also supports Location and Power Discovery Services to automate many configuration, asset tracking, and power management tasks to speed implementation and prevent downtime. For more information, see http://www.hp.com/go/insightcontrol.
		HP Insight Control includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, see: http://www.hp.com/services/insight.
	HP iLO Essentials	HP iLO Essentials license ideal for small and medium business customers. The specially created HP iLO Essentials (a subset of iLO Advanced functionality) saves SMB customers time and money, by ease of remote server set up through the interactive virtual media, lowering operational costs with remote access via the Integrated Remote Console, and faster time to resolution with email-based proactive notifications. With this newly designed HP iLO Essentials license SMB customers now have the option of a server management package solely design and priced just right for their IT environments. HP iLO Essentials is available on all HP ProLiant Gen8 e-series making this an ideal solution for small business owners. For more information, see: http://www.hp.com/go/iLO/essentials
	HP iLO Advanced	HP Integrated Lights-Out Advanced License a product option, providing smart remote server management without compromise. iLO Advanced unlocks the full set of remote administration functionality for all HP ProLiant servers by activating the full Virtual Keyboard Video and Mouse remote console, multi- user collaboration, console record and replay, GUI-based and scripted virtual media and virtual folders, and enhanced security and power management functionality. For more information, see: http://www.hp.com/go/iloadvance
	HP Matrix Operating Environment	The HP Matrix Operating Environment (Matrix OE) for ProLiant and Integrity servers is an integrated command center that helps you instantly adjust to dynamic business demands. This advanced infrastructure management software lets you reduce the cost of common data center tasks by up to 40 percent while keeping pace with your changing business.
		The HP Matrix OE includes the automated provisioning, optimization, and recovery management capabilities for HP CloudSystem Matrix, the ideal platform for private cloud and Infrastructure as a Service (IaaS).
		NOTE: For more information, visit: http://www.hp.com/go/matrixoe



Optional Features

optionati eatures		
High Performance Clusters	HP Cluster Platforms	HP Cluster Platforms are specifically engineered, factory-integrated large- scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering. http://www.hp.com/go/clusters.
	HP HPC Interconnects	High Performance Computing (HPC) interconnect technologies are available for this server as part of the HP Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by HP when integrated within an HP cluster. Flexible, validated solutions can be defined with the help of configuration tools. http://www.hp.com/techservers/clusters/ucp/index.html
	HP Insight Cluster Management Utility	HP Insight Cluster Management Utility (CMU) is an HP-licensed and HP- supported suite of tools that are used for lifecycle management of hyperscale clusters of Linux ProLiant systems. CMU includes software for the centralized provisioning, management and monitoring of nodes. CMU makes the administration of clusters user friendly, efficient, and effective. http://www.hp.com/go/cmu
	HP HPC Linux Value Pack	HP HPC Linux Value Pack (Value Pack) is an HP-licensed and HP-supported option to HP Insight CMU, bundle for the development and deployment of applications on HPC Cluster Platforms. Value Pack includes the Platform LSF workload scheduler and Platform Application Center, as well as the HP-MPI parallelization library. HP HPC Linux Value Pack

Storage Software

Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HP storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities. Storage software that gets the job done:

• Data Protection and Recovery Software

Whether you're a large enterprise or a smaller business, HP data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.

• Data Archive and Migration Software

HP's storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.

• Storage Resource Management Software (SRM)

HP's storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.

Data Replication Software

HP offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.

Storage Device Management Software
 Maximize your investment in HP storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.

HP StoreVirtual VSA

With HP StoreVirtual VSA you can use the power of virtualization to turn a set of heterogeneous and



Optional Features	
	disconnected physical disk drives in your servers and storage devices into a single pool of logical storage capacity.
	NOTE: For more information available Storage Software including QuickSpecs, please see: www.hp.com/go/storage/software.
HP Insight Online	HP Insight Online is a new addition to the HP Support Center for one stop, secure access to product and HP support information personalized to your IT environment. Insight Online can automatically display devices remotely monitored by HP Insight Remote Support. With Insight Online's easy navigation you can efficiently track your IT support contracts and device status from anywhere and at anytime. www.hp.com/go/insightonline
HP Proactive Insight experience	Prevent problems with innovative, automated monitoring tools and proactive services. The HP Proactive Insight experience consist of using Insight Online, Insight Remote Support, and Proactive Care Support Service as one integrated solution. The Proactive Insight experience provides you with expert advice and personalized, cloud-based automated IT support, helping to prevent unplanned down time and solve problems quickly. For more information, visit: www.hp.com/go/proactiveinsightexperience
Factory Express Portfolio for Servers and Storage	HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.
	Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.
	For more information on Factory Express services for your specific server model please contact your sales representative or go to: http://www.hp.com/go/factory-express.
HP Simple Configurator	SCE is a guided self service tool to help sales and non technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact HP's Customer Business Center or an Authorized Partner for assistance. http://www.hp.com/products/configurator

hp

Service and Support

Service and Support HP Technology Services for Industry Standard Servers and BladeSystem Capitalizing on HP ProLiant server and HP BladeSystem capabilities requires a service partner who understands your increasingly complex business technology environment. That's why it makes sense to team up with the people who know HP infrastructure hardware and software best - the experienced professionals at HP Services. What HP ProLiant and BladeSystem Services can do for you HP ProLiant and BladeSystem Services can help you design, deploy, test, integrate, support, and manage IT and infrastructure solutions. This way, HP proposes services solutions that include more than just uplift of base warranty. Foundation Care services deliver scalable support-packages for HP industry-standard servers and software. You can choose the type and level of service that is most suitable for their business needs. New to this portfolio is HP Collaborative Support. If you are running business critical environments, HP offers Proactive Care or Critical Advantage. These services help deliver high levels of application availability through proactive service management and advanced technical response You can get the support you need by choosing from one of a number of service packaged solutions we have designed to address wider set of customer support needs. HP Technology Services meets business challenges with services offered in three support recommendations - Optimized Care, Standard Care, and Basic Care - available for each product group. Such support solutions enable customers to optimize technology operations, minimize risk and drive better business outcomes with easy-to-buy, easy-to-use scalable support recommendations for servers, storage, networking and software designed to meet your specific needs. All three service recommendations include support services from the broader portfolio of Foundation Care and Proactive Care services. **Optimized** Care Optimized Care: Supports maintaining servers at optimum performance availability **HP ProLiant Server Hardware Installation** Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf HP Installation and Startup for Insight Control Software / HP SIM Provides for the deployment and basic configuration of HP Insight Control or HP SIM (Systems Insight Manager) on HP ProLiant ML and DL series servers or HP BladeSystem servers http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA0-9972ENW.pdf 3-Year HP 24x7 4 hour Response, Proactive Care Helps optimize your systems and delivers high levels of application availability through proactive service management and advanced technical response. A skilled Technical Manager will own your call and end to end until resolved, delivering a single point of contact for you. Helping you to resolve your hardware and software issues and minimizing downtime in your business critical environment. Additional Services: Factory Express, Education Services, Proactive Select - 30 Credit Package



Service and Support

Standard Care	Standard Care: Service recommendation that maintains high level of server availability				
	HP ProLiant Server Hardware Installation				
	Provides for the basic hardware installation of HP branded servers, storage devices and networking				
	options to assist you in bringing your new hardware into operation in a timely and professional manner				
	http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf				
	HP Installation and Startup for Insight Control Software / HP SIM				
	Provides for the deployment and basic configuration of HP Insight Control or HP SIM (Systems Insight				
	Manager) on HP ProLiant ML and DL series servers or HP BladeSystem servers				
	http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA0-9972ENW.pdf				
	3-Year HP 24x7 4 hour Response, Collaborative Support				
	Provides problem resolution support across the stack of HW, firmware, and HP and 3rd party SW. In case				
	the issue is with 3rd party SW, HP does known issue resolution. If HP cannot solve the issue, it will contact				
	the third-party vendor and create a problem incident on your behalf.				
	http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA3-8232ENW.pdf				
	Additional Services: Software support service with 24X7 availability with a 2 hour response, Training				
	courses on Microsoft, Linux (Red Hat and SUSE), VMware, and HP Insight Software, 10 Proactive Select				
	Credit package, Factory Express				
	http://www8.hp.com/us/en/business-services/it-services.html?compURI=1078865				
Basic Care	Basic Care: delivers minimum recommended support service level				
	HP ProLiant Server Hardware Installation				
	Provides for the basic hardware installation of HP branded servers, storage devices and networking				
	options to assist you in bringing your new hardware into operation in a timely and professional manner				
	http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf				
	3-Year HP 24x7 4 hour Response, Hardware Support Onsite Service				
	Provides you with rapid remote support and if required an HP authorized technical engineer will be on site				
	24X7 begin hardware maintenance service within 4 hours of the service request being logged				
	http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-6547EEE.pdf				
	3-Year , HP 24x7 Software Support for Insight Control				
	Provides remote 3-year software support service that delivers comprehensive software services, including				
	access to HP technical resources and software updates				
	http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6645EEE.pdf				
	Additional Services: Factory Express, Education Services, Proactive Select - 10 Credits				
Insight Remote Support	Provides 24 X 7 remote monitoring, proactive notifications, and problem resolution. Learn more				
	http://www.hp.com/go/insightremotesupport				



Service and Support	
HP Support Center	Personalized online support portal with access to information, tools and experts to support HP business products. Submit support cases online, chat with HP experts, access support resources or collaborate with peers. Learn more http://www.hp.com/go/hpsc
	HP's Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime. HP Insight Remote Support and HP Support Center are available at no additional cost with a HP warranty, HP Care Pack or HP contractual support agreement.
	*HP' Support Center Mobile App is subject to local availability
Warranty / Service Coverage	For ProLiant servers and storage systems, the services cover HP-branded hardware options qualified for the server, purchased at the same time or afterward, internal to the enclosure, as well as external monitors up to 22" and tower UPS products; these items will be covered at the same service level and for the same coverage period as the server unless the maximum supported lifetime and/or the maximum usage limitation has been exceeded. Coverage of the UPS battery is not included; standard warranty terms and conditions apply.
	The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HP due to malfunction. It does not apply to any exchange of Disk or SSD/Flash Drives that have not failed. SSD/Flash Drives that are specified by HP as consumable parts and/or that have exceeded maximum supported lifetime and/or the maximum usage limit as set forth in the manufacturer's operating manual or the technical data sheet are not eligible for the defective media retention service feature option.
For more information	To learn more on HP ProLiant servers and HP BladeSystem servers, please contact your HP sales representative or HP Authorized Channel Partner. Or visit: http://www.hp.com/services/proliant



Pre-configured Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

NOTE: Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

NOTE: HP does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

NOTE: If you desire a custom configuration please see "Configuration Information – Factory Integrated Models" section of this QuickSpecs.

NOTE: Maximum speed supported depends on the CPU installed. Entry model will support maximum speed of 1600 MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: www.hp.com/go/ddr3memory-configurator. **NOTE:** All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 666987-B21: HP SFF Gen8 Hard Drive Blank Kit or P/N 666986-B21: HP LFF Gen8 Hard Drive Blank Kit.

Entry Models

HP ProLiant DL320e Gen8	Processor(s)	(1) Intel® Pentium® G2120 (3.1GHz/2-core/3MB/55W) Processor
G2120 1P 2GB-U Non-hot	Cache Memory	3MB (1x3MB) Level3
Plug SATA 4 LFF 350W PS Server	Memory	2GB (1 x 2GB) Unbuffered DIMMs PC3-12800E (1600MHz)
675420-001	Network Controller	HP Ethernet 1Gb 2-port 330i Adapter
	Storage Controller	HP Dynamic Smart Array B120i Controller
	Hard Drive	(1) 500GB 3.5" Non-hot plug SATA
	Internal Storage	4 bay LFF Non hot plug Drive Cage; includes 3 LFF hard drive blanks
	Optical Drive Bay	None ships standard
	PCI-Express Slots	1 PCle3 x16 and 1 PCle2 x8
	Power Supply	350 Watts Non-Hot Plug, Non redundant Power Supply NOTE: The 350 Watts Non-Hot Plug Non redundant Power Supply is rated at 85% efficiency.
	Fans	4 fan modules ship standard, non-redundant
	Management	HP iLO Management Engine (standard) Optional: HP iLO Essentials or HP Insight Control
	Form Factor	1U, HP Friction Rail Kit
	Warranty	Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response.



Pre-configured Models

Base Models

HP ProLiant DL320e Gen8	Processor(s)	(1) Intel® Xeon® E3-1220v2 (3.1GHz/4-core/8MB/69W, HT) Processor
E3-1220v2 1P 4GB-U Hot	Cache Memory	8MB (1x8MB) Level3
Plug 4 LFF 350W PS Server 675421-001	Memory	4GB (1 x 4GB) Unbuffered DIMMs PC3-12800E (1600MHz)
075421-001	Network Controller	HP Ethernet 1Gb 2-port 330i Adapter
	Storage Controller	HP Dynamic Smart Array B120i Controller
	Hard Drive	None ship standard NOTE: Only SATA 3 Gbit/s data transmission guaranteed without HP Smart Array Card.
	Internal Storage	4 bay LFF Hot Plug Drive Cage; includes 3 LFF hard drive blanks
	Optical Drive Bay	None ships standard
	PCI-Express Slots	1 PCle3 x16 and 1 PCle2 x8
	Power Supply	350 Watts Non-Hot Plug, Non redundant Power Supply NOTE: The 350 Watts Non-Hot Plug Non redundant Power Supply is rated at 85% efficiency.
	Fans	4 fan modules ship standard, non-redundant
	Management	HP iLO Management Engine (standard) Optional: HP iLO Essentials or HP Insight Control
	Form Factor	1U, HP Friction Rail Kit
	Warranty	Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response.

Performance Models

HP ProLiant DL320e Gen8	Processor(s)	(1) Intel® Xeon® E3-1240v2 (3.4GHz/4-core/8MB/69W, HT) Processor
Hot Plug 4 LFF 350W PS	Cache Memory	8MB (1x8MB) Level3
	Memory	8GB (2 x 4GB) Unbuffered DIMMs PC3-12800E (1600MHz)
675422 -001	Network Controller	HP Ethernet 1Gb 2-port 330i Adapter
	Storage Controller	HP Smart Array P222/512MB FBWC Controller
	Hard Drive	None ship standard
	Internal Storage	4 bay LFF Hot Plug Drive Cage; includes 3 LFF hard drive blanks
	Optical Drive Bay	None ships standard
	PCI-Express Slots	1 PCIe2 x8 available
	Power Supply	350 Watts Non-Hot Plug, Non redundant Power Supply NOTE: The 350 Watts Non-Hot Plug Non redundant Power Supply is rated at 85% efficiency.
	Fans	4 fan modules ship standard, non-redundant
	Management	HP iLO Management Engine (standard) Optional: HP Insight Control
	Form Factor	1U, HP Friction Rail Kit
	Warranty	Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response



Pre-configured Models

HP ProLiant DL320e Gen8 E3-1220v2 1P 4GB-U Non-	• • • • • •	(1) Intel® Xeon® E3-1220v2 (3.1GHz/4-core/8MB/69W, HT)
hot Plug 4 LFF 350W PS	cache Hemory	8MB (1x8MB) Level3 4GB (1 x 4GB) Unbuffered DIMMs PC3-12800E (1600MHz)
Server	Memory Network Controller	HP Ethernet 1Gb 2-port 330i Adapter
687520-S01	Storage Controller	HP Dynamic Smart Array B120i Controller
	Hard Drive	(1) HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) Midline Hard Drive
	Internal Storage	4 LFF HDD Bays; includes 3 LFF hard drive blanks
	Optical Drive Bay	None ships standard
	PCI-Express Slots	1 PCle2 x16 and 1 PCle2 x8
	Power Supply	350 Watts Non-Hot Plug, Non redundant Power Supply
	Fans	4 fan modules ship standard, non-redundant
	Management	HP iLO Management Engine (standard) Optional: HP Insight Control
	Form Factor	1U, HP Friction Rail Kit
	Warranty	Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response.
HP ProLiant DL320e Gen8	Processor(s)	Intel® Xeon® E3-1240v2 (3.4GHz/4-core/8MB/69W, HT)
E3-1240v2 1P 8GB-U Hot	Cache Memory	Intel® Xeon® E3-1240v2 (3.4GHz/4-core/8MB/69W, HT) 8MB (1x8MB) Level3
E3-1240v2 1P 8GB-U Hot Plug 4 LFF 350W PS Server	Cache Memory	
E3-1240v2 1P 8GB-U Hot	Cache Memory	8MB (1x8MB) Level3
E3-1240v2 1P 8GB-U Hot Plug 4 LFF 350W PS Server	Cache Memory Memory	8MB (1x8MB) Level3 8GB (2 x 4GB) Unbuffered DIMMs PC3-12800E (1600MHz)
E3-1240v2 1P 8GB-U Hot Plug 4 LFF 350W PS Server	Cache Memory Memory Network Controller	8MB (1x8MB) Level3 8GB (2 x 4GB) Unbuffered DIMMs PC3-12800E (1600MHz) HP Ethernet 1Gb 2-port 330i Adapter
E3-1240v2 1P 8GB-U Hot Plug 4 LFF 350W PS Server	Cache Memory Memory Network Controller Storage Controller	8MB (1x8MB) Level3 8GB (2 x 4GB) Unbuffered DIMMs PC3-12800E (1600MHz) HP Ethernet 1Gb 2-port 330i Adapter HP Dynamic Smart Array B120i Controller
E3-1240v2 1P 8GB-U Hot Plug 4 LFF 350W PS Server	Cache Memory Memory Network Controller Storage Controller Hard Drive	8MB (1x8MB) Level3 8GB (2 x 4GB) Unbuffered DIMMs PC3-12800E (1600MHz) HP Ethernet 1Gb 2-port 330i Adapter HP Dynamic Smart Array B120i Controller None ship standard
E3-1240v2 1P 8GB-U Hot Plug 4 LFF 350W PS Server	Cache Memory Memory Network Controller Storage Controller Hard Drive Internal Storage	8MB (1x8MB) Level3 8GB (2 x 4GB) Unbuffered DIMMs PC3-12800E (1600MHz) HP Ethernet 1Gb 2-port 330i Adapter HP Dynamic Smart Array B120i Controller None ship standard 4 LFF HDD Bays; includes 3 LFF hard drive blanks
E3-1240v2 1P 8GB-U Hot Plug 4 LFF 350W PS Server	Cache Memory Memory Network Controller Storage Controller Hard Drive Internal Storage Optical Drive Bay	8MB (1x8MB) Level3 8GB (2 x 4GB) Unbuffered DIMMs PC3-12800E (1600MHz) HP Ethernet 1Gb 2-port 330i Adapter HP Dynamic Smart Array B120i Controller None ship standard 4 LFF HDD Bays; includes 3 LFF hard drive blanks None ships standard
E3-1240v2 1P 8GB-U Hot Plug 4 LFF 350W PS Server	Cache Memory Memory Network Controller Storage Controller Hard Drive Internal Storage Optical Drive Bay PCI-Express Slots	8MB (1x8MB) Level3 8GB (2 x 4GB) Unbuffered DIMMs PC3-12800E (1600MHz) HP Ethernet 1Gb 2-port 330i Adapter HP Dynamic Smart Array B120i Controller None ship standard 4 LFF HDD Bays; includes 3 LFF hard drive blanks None ships standard 1 PCle2 x16 and 1 PCle2 x8
E3-1240v2 1P 8GB-U Hot Plug 4 LFF 350W PS Server	Cache Memory Memory Network Controller Storage Controller Hard Drive Internal Storage Optical Drive Bay PCI-Express Slots Power Supply	8MB (1x8MB) Level3 8GB (2 x 4GB) Unbuffered DIMMs PC3-12800E (1600MHz) HP Ethernet 1Gb 2-port 330i Adapter HP Dynamic Smart Array B120i Controller None ship standard 4 LFF HDD Bays; includes 3 LFF hard drive blanks None ships standard 1 PCIe2 x16 and 1 PCIe2 x8 350 Watts Non-Hot Plug, Non redundant Power Supply
E3-1240v2 1P 8GB-U Hot Plug 4 LFF 350W PS Server	Cache Memory Memory Network Controller Storage Controller Hard Drive Internal Storage Optical Drive Bay PCI-Express Slots Power Supply Fans	 8MB (1x8MB) Level3 8GB (2 x 4GB) Unbuffered DIMMs PC3-12800E (1600MHz) HP Ethernet 1Gb 2-port 330i Adapter HP Dynamic Smart Array B120i Controller None ship standard 4 LFF HDD Bays; includes 3 LFF hard drive blanks None ships standard 1 PCle2 x16 and 1 PCle2 x8 350 Watts Non-Hot Plug, Non redundant Power Supply 4 fan modules ship standard, non-redundant HP iLO Management Engine (standard)



Smart Buys

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

NOTE: Factory Integrated Models must start with a CTO Server.

NOTE: FIO indicates that this option is only available as a factory installable option.

NOTE: All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.

Step 1: Base Configuration (choose one of the following configurable models)

HP Models

HP ProLiant DL320e Gen8 Hot Plug 4 LFF Configure-to-order Server **NOTE:** All 6G SATA/SAS Drives listed in HDD section are tested and supported for both 3G and 6G speed. A HP Smart Array Controller is required for 6G HDD.

675597-B21

Factory Integrated Model ships with:

1U Chassis with 4 LFF Hot Plug Drive Cage HP Ethernet 1Gb 2-port 330i Adapter HP iLO Management Engine (standard) HP Dynamic Smart Array B120i SATA Controller (RAID 0/1/10) NOTE: For set up instructions for HP Dynamic Smart Array B120i SATA Controller please refer to the HP ProLiant DL300 series server user guide NOTE: For general information about HP Dynamic Smart Array B120i SATA Controller, please visit: http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/ smartarrayb120i/index.html HP ProLiant DL320e Gen8 Hot Plug 8 SFF Configure-to-order Server 675598-B21 **Factory Integrated Model ships with:** 1U Chassis with 8 SFF Hot Plug Drive Cage HP Ethernet 1Gb 2-port 330i Adapter HP iLO Management Engine (standard) HP Dynamic Smart Array B120i SATA Controller (RAID 0/1/10) NOTE: For set up instructions for HP Dynamic Smart Array B120i SATA Controller please refer to the HP ProLiant DL300 series server user guide NOTE: For general information about HP Dynamic Smart Array B120i SATA Controller, please visit: http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/ smartarrayb120i/index.html HP ProLiant DL320e Gen8 Non-hot Plug 4 LFF Configure-to-order Server 675596-B21 **NOTE:** All 6G SATA/SAS Drives listed in HDD section are tested and supported for both 3G and 6G speed. A HP Smart Array Controller is required for 6G HDD. **Factory Integrated Model ships with:** 10 Chassis with 4 LFF Non hot plug Drive Cage HP Ethernet 1Gb 2-port 330i Adapter

HP Ethernet 1GD 2-port 3301 Adapter HP iLO Management Engine (standard) HP Dynamic Smart Array B120i SATA Controller (RAID 0/1/10) **NOTE:** For set up instructions for HP Dynamic Smart Array B120i SATA Controller please refer to the HP ProLiant DL300 series server user guide **NOTE:** For general information about HP Dynamic Smart Array B120i SATA Controller, please visit:

Configuration Information - Factory Integrated Models

http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/ smartarrayb120i/index.html

Step 2: Choose noted)	Required Options (only one of the following from each list unless o	therwise
HP Processors	Entry Processors NOTE: All support up to 1600MHz DDR3 memory speeds except Intel® Pentium® G630 which supports up to 1066MHz DDR3 memory speeds	
	HP DL320e Gen8 Intel® Pentium® G630 (2.7GHz/2-core/3MB/65W) FIO Processor Kit	682797-L21
	HP DL320e Gen8 Intel® Pentium® G2120 (3.1GHz/2-core/3MB/55W) FIO Processor Kit	703278-L21
	HP DL320e Gen8 Intel® Pentium® G2100T (2.6GHz/2-core/3MB/35W) FIO Processor Kit	703280-L21
	Base Processors	
	NOTE: All support up to1600MHz DDR3 memory speeds.	
	HP DL320e Gen8 Intel® Core™ i3-3220T (2.8GHz/2-core/3MB/35W) FIO Processor Kit	700792-L21
	HP DL320e Gen8 Intel® Core™ i3-3240 (3.4GHz/2-core/3MB/55W) FIO Processor Kit	700786-L21
	Performance Processors	
	NOTE: All support up to 1600MHz DDR3 memory speeds.	
	HP DL320e Gen8 Intel® Xeon® E3-1220Lv2 (2.3GHz/2-core/3MB/17W) FIO Processor Kit	682789-L21
	HP DL320e Gen8 Intel® Xeon® E3-1220v2 (3.1GHz/4-core/8MB/69W) FIO Processor Kit	682787-L21
	HP DL320e Gen8 Intel® Xeon® E3-1230v2 (3.3GHz/4-core/8MB/69W) FIO Processor Kit	682785-L21
	HP DL320e Gen8 Intel® Xeon® E3-1240v2 (3.4GHz/4-core/8MB/69W) FIO Processor Kit	682783-L21
	HP DL320e Gen8 Intel® Xeon® E3-1270v2 (3.5GHz/4-core/8MB/69W) FIO Processor Kit	682781-L21
	HP DL320e Gen8 Intel® Xeon® E3-1290v2 (3.7GHz/4-core/8MB/87W) FIO Processor Kit	682777-L21
HP Memory	NOTE: To realize the performance memory capabilities listed in this document, HP SmartMemory is required. For additional information, please see the HP SmartMemory QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/14225_na/14225_na.html NOTE: HP memory from previous generation servers are not fully compatible with new Active Health features on the DL320e Gen8 Server.	
	Unbuffered with ECC DIMMs (UDIMMs)	
	HP 2GB (1x2GB) Single Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669320-B21
	HP 2GB (1x2GB) Single Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647905-B21
	HP 2GB (1x2GB) Single Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit/S-Buy	647905-S21
	HP 4GB (1x4GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669322-B21
	HP 4GB (1x4GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647907-B21
	HP 4GB (1x4GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit/S-Buy	647907-S21



Configuration Information - Factory Integrated Models

	HP 8GB (1x8GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669324-B21
	HP 8GB (1x8GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647909-B21
	 NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator. NOTE: Depending on the memory configuration and processor model, 1600MHz and 1333MHz memory may operate at a lower speed. Please see the see the "Memory" 	
	section later in this document and the Online Memory Configuration Tool for details at www.hp.com/go/ddr3memory-configurator. NOTE: For additional memory rules and guidelines, see the "Memory" section later in this document.	
	NOTE: For more information on ProLiant Energy Efficient Features, see: www.hp.com/go/proliant-energy-efficient NOTE: PC3L is a low voltage memory.	
Power Supplies	NOTE: Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor.	
	HP 350W 1U Factory Integrated Power Supply Kit NOTE: The 350 Watts Power Supply is rated at 85% efficiency.	675450-B21
	HP Common Slot Platinum Plus Power Supply Kits NOTE: The following Power Supplies offer 94% efficiency with support for Intelligent Power Discovery.	
	HP 460W Common Slot Platinum Plus Hot Plug Power Supply Kit	656362-B21
	HP Common Slot Gold Power Supplies NOTE: The following Power Supplies offer 92% efficiency.	
	HP 460W Common Slot Gold Hot Plug Power Supply Kit	503296-B21
	HP DL320e Gen8 Factory Integrated RPS Enablement Kit NOTE: When selecting Common Slot power supply options for the DL320e Gen8 server, a HP DL320e Gen8 RPS Enablement FIO Kit (675451-B21) is required for HP common slot redundant power supply configurations.	675451-B21
	NOTE: Option Kits for AC power supplies include the power supply and one PDU IEC	
	cable. NOTE: HP ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For a full list of optional HP power cords please go to www.hp.com/products/powercords	
	NOTE: Power Specification and Technical Content for supported power supplies can be found at: http://h18000.www1.hp.com/products/quickspecs/14209_na/14209_na.html	
	http://htobbo.wwwi.hp.com/products/quickspecs/14209_lid/14209_lid/life	



ΗP

Configuration Information - Factory Integrated Models

Step 3: Choose Additional Factory Integratable Options

HP USB Kit	HP Gen8 FIO Internal USB Kit	662961-B21
HP Rail Kits	NOTE: Gen8 rail kits have changed significantly from prior generation rail kits. Please take a moment to review the installation documentation that comes with the server to help you with the installation of your Gen8 server. NOTE: Rail kits are optional for Gen8 and are no longer included standard with the server. Customers have the option to purchase their server without a rail kit. CAUTION: HP recommends that at least two people are used for all rack server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.	
	HP 1U Friction Gen8 FIO Rail Kit NOTE: Kit contains non-telescoping friction rails which do not allow for in rack serviceability. The HP 1U Gen8 Cable Management Arm is not available when using Friction Rails. Caution: HP recommends that a minimum of two people is required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.	663200-B21
HP Insight Software	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License	C6N36A

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below.



Core Options

HP Unique Options	HP DL320e Gen8 Mini SAS Cable Kit NOTE: HP DL320e Gen8 mini SAS cable kit would be required for the server to be compatible with 4LFF Hot Plug drives, H222 and P222 controllers.	685018-B2 ⁻
HP Memory	NOTE: To realize the performance memory capabilities listed in this document, HP SmartMemory is required. For additional information, please see the HP SmartMemory QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/14225_na/14225_na.html	
	NOTE: HP memory from previous generation servers are not fully compatible with SmartMemory features in Gen8 Servers.	
	Unbuffered with ECC DIMMs (UDIMMs)	
	HP 2GB (1x2GB) Single Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669320-B2 ⁻
	HP 2GB (1x2GB) Single Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647905-B2
	HP 2GB (1x2GB) Single Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit S-Buy	647905-S2
	HP 4GB (1x4GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669322-B2
	HP 4GB (1x4GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647907-B2
	HP 4GB (1x4GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit S-Buy	647907-S2
	HP 8GB (1x8GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669324-B2
	HP 8GB (1x8GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647909-B2
	NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator.	
	NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: www.hp.com/go/proliant-energy-efficient. NOTE: PC3L is a low voltage memory.	
HP Optical Drives	HP 9.5mm SATA DVD-ROM JackBlack Optical Drive	652238-B2
	HP 9.5mm SATA DVD-RW JackBlack Optical Drive	652241-B2 ⁻
HP Hard Drives	NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.	



Core Options

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Hot Plug with SmartDrive SFF (2.5-inch) Enterprise Drives

SAS NOT Plug with Sinal (Drive SFF (2.5-intil) Enterprise Drives	
HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	697574-B21
HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652589-B21
HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive S-Buy	652589-S21
HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652583-B21
HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive S-Buy	652583-S21
HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652572-B21
HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652564-B21
HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive S-Buy	652564-S21
HP 300GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652611-B21
HP 300GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive S-Buy	652611-S21
HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652605-B21
HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive S-Buy	652605-S21
SAS Hot Plug SmartDrive SFF (2.5-inch) Midline Drives	
HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	652749-B21
HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	652745-B21
SAS Hot Plug SmartDrive LFF (3.5-inch) Enterprise Drives	
HP 600GB 6G SAS 15K rpm LFF (3.5-inch) SC Enterprise 3yr Warranty Hard Drive	652620-B21
HP 450GB 6G SAS 15K rpm LFF (3.5-inch) SC Enterprise 3yr Warranty Hard Drive	652615-B21
SAS Hot Plug SmartDrive LFF (3.5-inch) Midline Drives	
HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	695510-B21
HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652766-B21
HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652757-B21
HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652753-B21
SAS Non-Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives	
HP 600GB 6G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive	516830-B21
HP 450GB 6G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive	516826-B21
NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
http://h18000.www1.hp.com/products/quickspecs/12244_na/12244_na.html	
6G SATA Hot Plug with SmartDrive SFF (2.5-inch) Midline (MDL) Drives	
HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	655710-B21
HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive S-Buy	655710-S21
HP 500GB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	655708-B21
HP 500GB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive S-Buy	655708-S21
6G SATA Hot Plug with SmartDrive LFF (3.5-inch) Midline (MDL) Drives	
HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	693687-B21



Core Options

HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	628061-B21
HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658079-B21
HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	657750-B21
HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive S-Buy	657750-S21
HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658071-B21
HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive S-Buy	658071-S21
6G SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives	
HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	628065-B21
HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	659339-B21
HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	659337-B21
HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	659341-B21
NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
http://h18000.www1.hp.com/products/quickspecs/13021_na/13021_na.html	
6G SATA ME Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives	
HP 800GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691868-B21
HP 400GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691866-B21
HP 200GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691864-B21
HP 100GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691862-B21
6G SATA ME Hot Plug LFF (3.5-inch) Enterprise Mainstream Solid State Drives	
HP 800GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691860-B21
HP 400GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691856-B21
HP 200GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691854-B21
HP 100GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691852-B21
6G SAS SLC Hot Plug SFF (2.5-inch) Enterprise Performance Solid State Drives	
HP 400GB 6G SAS SLC SFF (2.5-inch) SC Enterprise Performance 3yr Warranty Solid State Drive	653082-B21
HP 200GB 6G SAS SLC SFF (2.5-inch) SC Enterprise Performance 3yr Warranty Solid State Drive	653078-B21
3G SATA MLC Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives	
HP 400GB 3G SATA MLC SFF (2.5-inch) SC Enterprise Mainstream 3yr Warranty Solid State Drive	653120-B21
HP 200GB 3G SATA MLC SFF (2.5-inch) SC Enterprise Mainstream 3yr Warranty Solid State Drive	653118-B21



HP 100GB 3G SATA MLC SFF (2.5-inch) SC Enterprise Mainstream 3yr Warranty Solid State Drive	653112-B21
3G SATA MLC Hot Plug LFF (3.5-inch) Enterprise Mainstream Solid State Drives	
HP 400GB 3G SATA MLC LFF (3.5-inch) SC Enterprise Mainstream 3yr Warranty Solid State Drive	653126-B21
HP 200GB 3G SATA MLC LFF (3.5-inch) SC Enterprise Mainstream 3yr Warranty Solid State Drive	653124-B21
HP 100GB 3G SATA MLC LFF (3.5-inch) SC Enterprise Mainstream 3yr Warranty Solid State Drive	653122-B21
NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
http://h18000.www1.hp.com/products/quickspecs/14038_na/14038_na.html Hard Drive Kits	
 NOTE: All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server. NOTE: The part numbers for single HDD blanks below are provided should the customer require replacement HDD blanks for their server. NOTE: The mixing of standard SAS drives with SAS SSD drives is supported within the server, but limits the RAID configuration to two separate RAID 0 volumes. Mixing of other drives types is not supported. 	
HP LFF Gen8 Hard Drive Blank Kit	666986-B21
HP SFF Gen8 Hard Drive Blank Kit	666987-B21
Gigabit Ethernet Adapters	
HP NC112T PCI Express Gigabit Server Adapter	503746-B21
HP NC365T 4-port Ethernet Server Adapter	593722-B21
HP Ethernet 1Gb 2-port 361T Adapter	652497-B21
HP Ethernet 1Gb 4-port 331T Adapter	647594-B21
HP Ethernet 1Gb 2-port 332T Adapter	615732-B21
10 Gigabit Ethernet Adapters NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter. NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber, optic anvironments muct be purchased coparately.	
	593717-B21
	614203-B21
	656596-B21
<u> </u>	
HP Ethernet 10Gb 2-port 560SFP+ Adapter HP Ethernet 10Gb 2-port 560SFP+ Adapter NOTE: Please see the QuickSpecs for Technical Specifications and additional	665249-B21
	State Drive 3G SATA MLC Hot Plug LFF (3.5-inch) Enterprise Mainstream Solid State Drives HP 400GB 3G SATA MLC LFF (3.5-inch) SC Enterprise Mainstream 3yr Warranty Solid State Drive HP 200GB 3G SATA MLC LFF (3.5-inch) SC Enterprise Mainstream 3yr Warranty Solid State Drive HP 100GB 3G SATA MLC LFF (3.5-inch) SC Enterprise Mainstream 3yr Warranty Solid State Drive NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/14038_na/14038_na.html Hard Drive Kits NOTE: All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server. NOTE: The part numbers for single HDD blanks below are provided should the customer require replacement HDD blanks for their server. NOTE: The part numbers for single HDD blanks below are provided should the customer require replacement HDD blanks for their server. NOTE: The part numbers of niguration to two separate RAID 0 volumes. Mixing of other drives types is not supported. HP LFF Gen8 Hard Drive Blank Kit HP SFF Gen8 Hard Drive Socy Adapter HP RC112T PCI Express Gigabit Server Adapter HP RC112T PCI Express Gigabit Server Adapter HP Ethernet 1Gb 2-port 31T Adapter HP Ethernet 1Gb 2-port 33TT Adapter HP Ethernet Adapters NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.



Core Options

HP Power Supplies	NOTE: Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor	
	HP Common Slot Platinum Plus Power Supply Kits NOTE: The following Power Supplies offer 94% efficiency with support for Intelligent Power Discovery.	
	HP 460W Common Slot Platinum Plus Hot Plug Power Supply Kit	656362-B21
	HP Common Slot Gold Power Supplies NOTE: The following Power Supplies offer 92% efficiency.	
	HP 460W Common Slot Gold Hot Plug Power Supply Kit	503296-B21
	NOTE: Option Kits for AC power supplies include the power supply and one PDU IEC cable.	
	NOTE: HP ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For a full list of optional HP power cords please go to www.hp.com/products/powercords	
	NOTE: Power Specification and Technical Content for supported power supplies can be found at: http://h18000.www1.hp.com/products/quickspecs/14209_na/14209_na.html	



Additional Options


HP Management	rator. Contact your local sales representative for additional information. HP Dedicated iLO Management Port Kit	
Hardware		674845-B21
HP Insight Software	HP Insight Control	
	HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License	C6N27A
	HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License S-Buy	C6N275
	HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License	C6N28AAE
	HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License S-Buy	C6N28ASE
	HP Insight Control Server Provisioning Media Kit	BD883A
	HP Insight Management Media Kit	C6N31A
	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Electronic License	C6N36AAE
	HP Insight Control Server Deployment including 1yr 24x7 Support Electronic License	T9082AAE
	HP Insight Control Server Deployment including 1yr 24x7 Support Single Server License	452151-B21
	 NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key. NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service. NOTE: Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: http://www.hp.com/go/insightupdates. 	
	NOTE: For additional license options please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12631_na/12631_na.html	
	HP Integrated Lights-Out (iLO)	
	HP Integrated Lights-Out (iLO) Advanced for ProLiant	
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates Electronic License	TA850AAE
	HP iLO Advanced Electronic License with 3yr 24x7 Tech Support and Updates	BD506AAE
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License	512485-B21
	HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates	BD505A
	HP iLO Essentials	
	HP Integrated Lights-Out Essentials including 3yr 24x7 Tech Support and Updates E- LTU	BD774AAE
	HP Integrated Lights-Out Essentials including 3yr 24x7 Tech Support and Updates Single Svr License	BD774A
	HP Integrated Lights-Out Essentials including 1yr 24x7 Tech Support and Updates E- LTU	BD775AAE



Additional Options		
	HP Integrated Lights-Out Essentials including 1yr 24x7 Tech Support and Updates Single Svr License NOTE: For additional license options please see the QuickSpecs at:	BD775A
	http://h18004.www1.hp.com/products/quickspecs/14276_na/14276_na.html NOTE: For more information, visit: http://www.hp.com/go/ilo.	
High Performance	HP Cluster Management Utility	
Clusters	HP Insight Cluster Management Utility 1yr 24x7 Flexible License	QL803B
	HP Insight Cluster Management Utility 3yr 24x7 Flexible License NOTE: These part numbers can be used to purchase one certificate for multiple licenses and support with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key. Customer also will receive a support agreement.	BD476A
	HP Insight Cluster Management Utility Media	BD477A
	NOTE: For additional license kits please see the QuickSpecs at http://h18004.www1.hp.com/products/quickspecs/12612_na/12612_na.html.	
	HP HPC Linux Value Pack	
	HP High Performance Computing Linux Value Pack 1 Processor Flexible License for ProLiant Servers NOTE: This part number can be used to purchase one certificate for multiple licenses with a single activation key. Each license is for one socket (a.k.a. processor). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key.	TC293B
	HP High Performance Computing Linux Value Pack Media Kit for ProLiant Servers NOTE: This part number can be used to purchase media including software and documentation, which will be delivered to the customer. NOTE: For additional license kits please see the QuickSpecs at http://h18004.www1.hp.com/products/quickspecs/13485_na/13485_na.html.	TC294A

Additional Options

HP Security	 HP Trusted Platform Module Option NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: www.hp.com/go/TPM. NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment. NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss. 	488069-B21
	HP 1U Security Gen8 Bezel Kit	664918-B21
HP Storage Controllers	SAS Controllers	
	Smart Array P222 Controller	634667 B34
	HP Smart Array P222/512 FBWC 6Gb 1-port Int/1-port Ext SAS Controller	631667-B21
	Smart Array P420 Controller	
	HP Smart Array P420/1GB FBWC 6Gb 2-ports Int SAS Controller	631670-B21
	HP Smart Array P420/2GB FBWC 6Gb 2-ports Int SAS Controller	631671-B21
	Smart Array P421 Controller	
	HP Smart Array P421/1GB FBWC 6Gb 2-ports Ext SAS Controller	631673-B21
	HP Smart Array P421/2GB FBWC 6Gb 2-ports Ext SAS Controller	631674-B21
	Optional Upgrades	
	HP 2GB P-series Smart Array Flash Backed Write Cache	631681-B21
	HP DL320e Gen8 Mini SAS Cable Kit	685018-B21
	HP Smart Array Advanced Pack 2.0 No Media 1 Server 1yr 24x7 Support Software	BC377A
	HP Smart Array Advanced Pack 2.0 No Media Electronic Lic 1yr 24x7 Support Software	BC390AAE
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/14227_na/14227_na.html	
	(Smart Array P222 Controller)	
	http://h18000.www1.hp.com/products/quickspecs/14228_na/14228_na.html	
	(Smart Array P420 Controller) http://h18000.www1.hp.com/products/quickspecs/14229_na/14229_na.html (Gmart Array P421 Controller)	
	(Smart Array P421 Controller) http://h18000.www1.hp.com/products/quickspecs/13200_na/13200_na.html (Smart Array Advanced Pack)	
	Host Bus Adapter	
	HP H220 Host Bus Adapter	650933-B21
	HP H221 Host Bus Adapter	650931-B21





Additional Options				
	HP H222 Host Bus Adapter	650926-B21		
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18004.www1.hp.com/products/quickspecs/14336_na/14336_na.html (HBA 220) http://h18004.www1.hp.com/products/quickspecs/14222_na/14222_na.html (HBA 221) http://h18004.www1.hp.com/products/quickspecs/14337_na/14337_na.html (HBA 222) SCSI HBA			
	HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter	412911-B21		
	NOTE: Please see the following QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/12566_na/12566_na.html (SC11Xe HBA)			
HP Tape Backup	NOTE: For the complete range of tape drives, autoloaders, libraries and media see: http://www.hp.com/go/tape. For hardware and software compatibility of HP tape backup products see: http://www.hp.com/storage/SPOCK and www.hp.com/go/ebs. NOTE: For Internal drives to be connected to DL servers please make sure that you order rack mount kit as well.			
	HP StoreEver LTO-6 Ultrium 6250 Tape Drive in 1U Rack-mount Kit	COL99A		
	HP StoreEver LTO-6 Ultrium 6650 Internal Tape Drive	EH963A		
	HP StoreEver LTO-6 Ultrium 6650 External Tape Drive	EH964A		
	HP StoreEver LTO-6 Ultrium 6250 Internal Tape Drive	EH969A		
	HP StoreEver LTO-6 Ultrium 6250 External Tape Drive	EH970A		
HP Storage Options	Fibre Channel HBA NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see: http://h18006.www1.hp.com/storage/saninfrastructure/hba.html			
	QLogic Fibre Channel HBAs			
	HP 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AK344A		
	HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ764A		
	Converged Network Adapter			
	HP CN1000Q Dual Port Converged Network Adapter	BS668A		



Additional Options

HP Uninterruptible Power	r HP Rack-mountable UPS				
Systems	HP R1500 G3 Uninterruptible Power Supply (UPS)				
	HP R1.5kVA G3 1U NA Uninterruptible Power System	AF469A			
	NOTE: Please see the QuickSpecs for additional information:				
	http://h18000.www1.hp.com/products/quickspecs/14059_na/14059_na.html				
	HP R/T3000 G2 Uninterruptible Power System (UPS)				
	HP R/T3000 G2 2U L530 Low Voltage NA/JP Uninterruptible Power System	AF466A			
	HP R/T3000 G2 2U L620 High Voltage NA/JP Uninterruptible Power System	AF467A			
	NOTE: Please see the QuickSpecs for additional information:				
	http://h18000.www1.hp.com/products/quickspecs/14058_na/14058_na.html				
	R5000 Uninterruptible Power System (UPS)				
	HP R5KVA 3U L630 High Voltage NA/JP Uninterruptible Power System	AF460A			
	NOTE: Please see the QuickSpecs for additional information:				
	http://h18000.www1.hp.com/products/quickspecs/14109_na/14109_na.html (Worldwide)				
	R7000 Uninterruptible Power System (UPS)				
	HP R7KVA 4U 50A High Voltage NA/JP Uninterruptible Power System	AF462A			
	NOTE: Please see the QuickSpecs for additional information:				
	http://h18000.www1.hp.com/products/quickspecs/14110_na/14110_na.html				
	NOTE: For additional information on HP Uninterruptible Power Systems please go to: www.hp.com/servers/rackups.				
	NOTE: For additional information on sizing your HP UPS, please reference: http://www.upssizer.com				
	NOTE: Please see the UPS and PDU cable matrix's on the HP Power Protection and				
	Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords.				
HP Power Distribution	Monitored PDUs				
Units	HP Monitored Power Distribution Unit: Full Rack Version				
	HP 8.6kVA 24A Single Input Three Phase NA/JP Monitored Power Distribution Unit	AF504A			
	HP 8.3kVA 40A Single Input Single Phase NA/JP Monitored Power Distribution Unit	AF506A			
	HP Monitored Power Distribution Unit: Half Rack Version				
	HP 4.9kVA 24A Single Input Single Phase NA/JP Monitored Power Distribution Unit	AF914A			
	NOTE: Please see the QuickSpecs for Technical Specifications and additional				
	information:				
	http://h18000.www1.hp.com/products/quickspecs/12118_na/12118_na.html				
	Modular PDUs 1U/OU				
	NOTE: 1U/0U mounting brackets shipped with the unit (optimized for 10000 G2 and 9000 series racks).				
	HP 2.8kVA 24A Low Voltage NA/JP Modular Power Distribution Unit	252663-D71			
	HP 4.9kVA 24A High Voltage NA/JP Modular Power Distribution Unit	252663-D72			



Additional Options

	 NOTE: For additional information on HP Power Distribution Units including accessories please go to: www.hp.com/go/pdu. NOTE: Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords. NOTE: This PDU has a detachable input power cord and allows for adaptability to country specific power requirements. NOTE: Please see the following QuickSpecs for additional options including shorter 	
	jumper cables and country specific power cords: http://h18000.www1.hp.com/products/quickspecs/11041_na/11041_na.html	
HP Intelligent Power	iPDU Core Units	
Distribution Units (iPDU)	HP 4.9kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit HP 8.6kVA 24A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit iPDU Extension Bars	AF520A AF522A
	HP 5xC13 Intelligent PDU Extension Bar G2 Kit	AF547A
	HP 5xC13 Outlets Power and UID LEDs Pair Standard Extension Bar	AF528A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13650_na/13650_na.html	
HP Basic Power	HP 1.9kVA 120 Volt 12 Outlet NA/JP Basic Power Distribution Unit	H5M54A
Distribution Units	HP 2.8kVA 120 Volt 18 Outlet NA/JP Basic Power Distribution Unit	H5M55A
	HP 3.6kVA 200-240 Volt 12 Outlet WW Basic Power Distribution Unit	H5M56A
	HP 3.6kVA 200-240 Volt 20 Outlet WW Basic Power Distribution Unit	H5M57A
	HP 4.9kVA 208 Volt 20 Outlet NA/JP Basic Power Distribution Unit	H5M58A
	HP 4.9kVA 208 Volt 30 Outlet NA/JP Basic Power Distribution Unit	H5M59A
	HP 8.3kVA 208 Volt 36 Outlet NA/JP Basic Power Distribution Unit	H5M60A
	HP 8.6kVA 208 Volt Three Phase 18 Outlet NA/JP Basic Power Distribution Unit	H5M61A
	HP 8.6kVA 208 Volt Three Phase 30 Outlet NA/JP Basic Power Distribution Unit	H5M62A
	HP 5.7kVA 208 Volt Three Phase 27 Outlet NA/JP Dual Voltage Basic Power Distribution Unit	H5M63A
	HP 8.6kVA 208 Volt Three Phase 30 Outlet NA/JP Dual Voltage Basic Power Distribution Unit	H5M64A
	HP 11kVA 400 Volt Three Phase 42 Outlet NA Basic Power Distribution Unit	H5M67A
	HP Hardwired 200-240 Volt 36 Outlet WW Basic Power Distribution Unit	H5M75A
	HP 13.2kVA 480 Volt Three Phase 15 Outlet NA Basic Power Distribution Unit	H3X07A
	HP 19.9kVA 480 Volt Three Phase 30 Outlet NA Basic Power Distribution Unit	H3X08A
	HP 277 Volt options for H3X07A and H3X08A	
	HP 800VA - 277V Input / 230V Output NA Rack Mount Transformer	НЗХО9А



Additional Options		
	NOTE: Please see the QuickSpecs for Technical Specifications and additional	
	information: http://h18000.www1.hp.com/products/quickspecs/14557_na/14557_na.html	
	NOTE: Additional HP Power Distribution Units are available. For a complete list of all HP	
	PDUs and additional information please visit www.hp.com/go/rackandpower.	
HP Rack Series	HP Intelligent Series Racks	
	HP 636 1075mm Pallet Intelligent Series Rack	BW895A
	HP 636 1075mm Shock Intelligent Series Rack	BW896A
	HP 642 1075mm Pallet Intelligent Series Rack	BW903A
	HP 642 1075mm Shock Intelligent Series Rack	BW904A
	HP 647 1075mm Pallet Intelligent Series Rack	BW911A
	HP 647 1075mm Shock Intelligent Series Rack	BW912A
	NOTE: Please see the QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:	
	http://h18000.www1.hp.com/products/quickspecs/14223_na/14223_na.html NOTE: For additional information regarding Rack Cabinets, please see the following URL: http://www.hp.com/go/rackandpower.	
HP Rack Options	HP Location Discovery Services	
	HP 36U Location Discovery Kit	BW945A
	HP 42U Location Discovery Kit	BW946A
	HP 47U Location Discovery Kit	BW947A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	http://h18000.www1.hp.com/products/quickspecs/14429_na/14429_na.html	
	HP TFT7600 G2 KVM Console and Monitor (TFT7600 G2)	
	HP TFT7600 G2 KVM Console Rackmount Keyboard US Monitor	AZ870A
	HP TFT7600 G2 KVM Console Rackmount Keyboard US TAA Monitor	AZ885A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	http://h18000.www1.hp.com/products/quickspecs/13731_na/13731_na.html	
	HP USB Keyboard and Mouse	
	HP USB BFR with PVC Free US Keyboard/Mouse Kit	631341-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13972_na/13972_na.html	
	HP Server Console Switches	
	HP Server Console 0x2x8 Port Analog Switch	AF616A
	HP Server Console 0x2x16 Port Analog Switch	AF617A
	HP TAA 0x2x16xKVM Server Console G2 Switch	AF626A



Additional Options

	NOTE: Please see the QuickSpecs for Technical Specifications and additional	
	information: http://h18000.www1.hp.com/products/quickspecs/11834_na/11834_na.html	
	HP Server Console Switch G2 with Virtual Media & CAC	
	HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software	AF618A
	HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software	AF619A
	HP KVM CAT5 1-pack USB Interface Adapter	336047-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional	550047 BE1
	information:	
	http://h18000.www1.hp.com/products/quickspecs/13475_na/13475_na.html	
	HP 1x4 USB/PS2 KVM Console Switch	
	HP 1x4 USB/PS2 KVM Console Switch	AF611A
	HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software	AF620A
	HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software	AF621A
	HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software	AF622A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	http://h18000.www1.hp.com/products/quickspecs/13474_na/13474_na.html	
	Rail Kits	
	HP 1U Gen8 Cable Management Arm	663203-B21
	HP 1U Small Form Factor Ball Bearing Gen8 Rail Kit	663201-B21
	HP 1U Large Form Factor Ball Bearing Gen8 Rail Kit	663202-B21
HP USB and SD Options	HP Flash Media Kits for USB Drives	
	HP 2GB USB Flash Media Drive Key Kit	608447-B21
	NOTE: HP qualified blank USB key for use with HP ProLiant servers that support the	
	VMware virtualization environment and other HP value-add software. HP recommends	
	this industry standard USB flash device for use with VMware ESXi. USB device must be	
	installed in the internal slot of the ProLiant server for use with VMware ESXi. Refer to HP VMware Getting Started Guide for installation instructions.	
	HP Enterprise Performance Flash Media Kits for Memory Cards	580387-B21
	HP 4GB SD Enterprise Performance Flash Media Kit	
	NOTE: Blank SD media device is supported for use with VMware and Citrix. SD media	
	must be installed in the internal slot of the ProLiant server. Learn more at:	
	http://www.hp.com/go/proliantvirtualization.	
	HP Enterprise Mainstream Flash Media Kits for Memory Cards	
	HP 32GB SD Enterprise Mainstream Flash Media Kit	700136-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional	
	information:	
	http://h18000.www1.hp.com/products/quickspecs/13971_na/13971_na.html	



Additional Options

HP Care Pack Services	Proactive Care	
	NOTE: Collaborative Support plus Proactive services delivered by the onshore, local language Advanced Solution Center (ASC), end-to-end case ownership from a Technical	
	Solution Specialists and Technical Account Manager who remotely delivers	
	firmware/software revision management, proactive scans and incident trend reports.	
	Recommended for customers running a virtualized infrastructure and/or customers who desire an enhanced call support experience.	
	HP 3 year 4 hour 24x7 ProLiant DL320e Proactive Care Service	U6F03E
	HP 3 year 4 hour 24x7 with Defective Media Retention ProLiant DL320e Proactive Care	U6F04E
	Service	001012
	HP 3 year 6 hour Call to Repair 24x7 ProLiant DL320e Proactive Care Service	U6F09E
	HP 3 year 6 hour Call to Repair 24x7 w/Defective Media Retention ProLiant DL320e Proactive Care SVC	U6F10E
	Collaborative Support	
	NOTE: Hardware break/fix plus 24x7 software diagnosis support with collaborative call	
	management for a broad spectrum of 3rd Party software products including O/S and hypervisors. Recommended for customers procuring 3rd party SW O/S and hypervisors	
	from the software vendors directly and deploying them on HP ProLiant servers.	
	HP 3 year 4 hour 24x7 ProLiant DL320e Collaborative Support	U6F01E
	HP 3 year 4 hour 24x7 with Defective Media Retention ProLiant DL320e Collaborative Support	U6F02E
	HP 3 year 6 hour Call to Repair 24x7 ProLiant DL320e Collaborative Support	U6F07E
	HP 3 year 6 hour Call to Repair 24x7 w/Defective Media Retention ProLiant DL320e Collaborative Sup	U6F08E
	Proactive Care Personalized Support Option	
	NOTE: To add an onsite Account Support Manager (ASM) to Proactive Care. ASM is an	
	assigned resource who delivers support planning and brings technical expertise and best practices advices for the customer's environment.	
	HP 3 year ISS ProactiveCare Personalized Support	U6W98E
	Installation Services	
	NOTE: Reduce the time required to get your system up and running and help minimize disruptions to your business.	
	HP Installation ProLiant DL320e Service	U6F51E
	HP Startup ProLiant DL320e Service	U6F53E
	NOTE: For more information, customer/resellers can contact:	
	http://www.hp.com/services/carepack	



Memory

HP SmartMemory

New HP SmartMemory now provides additional protection for your servers. With HP Authentication it can verify that you have true HP Qualified Memory in your HP ProLiant Gen8 server. With HP SmartMemory your new HP ProLiant server can take advantage of additional Gen8 enhancements in performance, durability and future manageability support through HP Active Health System

For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator

Memory Subsystem Architecture

Intel Processor socket supports 2 channels and 2 DIMMs per channel. Total max. memory up to 32GB DDR3 PC3-12800E1600MHz.

Standard Memory Plus Optional Memory

Up to 32 GB memory is available with the optional installation of 4 x 8GB PC3-12800E UDIMM ECC DDR3 UDIMM Memory kits, operating at 1600MHz when fully populated at 2 DIMMs per Channel in 4 slots. **NOTE:** The below chart does not represent all possible memory configurations. **NOTE:** For best performance, it is recommended that customer installs memory in identical pairs

General Memory Population Rules and Guidelines:

- The HP ProLiant DL320e Gen8 Server has four memory slots
- There are two channels per server with two DIMM slot per channel
- Memory channel A consists of the two (2) DIMMs that are closest to the processor
- Memory channel B consists of the two (2) DIMMs that are furthest from the processor
- Different types of processors have different types of memory support.
- Support for single/dual-rank 1333/1600 MT/s ECC UDIMM (unbuffered DIMMS)
- The server supports up to 32 GB (4 x 8-GB) for Unbuffered DIMMs
- No support for LV-DIMMs; RDIMMs; Non-ECC UDIMMs
- Do not install DIMMs if the processor is not installed
- Populate DIMMs from heaviest load (double-rank) to lightest load (single-rank)
- Always use HP qualified DIMM

Farthest DIMM (either CHA or CHB) should always be populated first



Memory

Memory Slot					
		DIMM1C DIMM2A DIMM3D DIMM4			DIMM4B
Standard (Entry Model)	2 GB	Empty	2 GB	Empty	Empty
Standard (Base Model)	4 GB	Empty	4 GB	Empty	Empty
Standard Performance Model)	8 GB	Empty	4 GB	Empty	4 GB
Maximum	32 GB	8 GB	8 GB	8 GB	8 GB

Memory Speed by Processor Model		
Processor Models	Supported Memory Speeds	
E3-1220v2, E3-1220Lv2, E3-1230v2, E3-1240v2, E3-1270v2, E3-1290v2, i3-3220T, i3-3240, G2120, G2100 T	1600/1333MHz	
G630	1066MHz	


Following are memory options available from HP:

HP Memory

- 7 - 1		
	NOTE: To realize the performance memory capabilities listed in this document, HP SmartMemory is required. For additional information, please see the HP SmartMemory QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/14225_na/14225_na.html	
	NOTE: HP memory from previous generation servers are not fully compatible with the	
	DL320e Gen8 Server.	
	Unbuffered with ECC DIMMs (UDIMMs)	
	HP 2GB (1x2GB) Single Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669320-B21
	HP 2GB (1x2GB) Single Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647905-B21
	HP 4GB (1x4GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669322-B21
	HP 4GB (1x4GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647907-B21
	HP 8GB (1x8GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669324-B21
	HP 8GB (1x8GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647909-B21
	NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator.	
	NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: www.hp.com/go/proliant-energy-efficient. NOTE: PC3L is a low voltage memory.	



Storage



- 1 4 4 x 3.5" (LFF) SAS/SATA hard drive bays
 - A Optical Drive Bay: Optional DVD-ROM, or DVD-RW drive
- 1 8 8 x 2.5" (SFF) SAS/SATA hard drive bays
 - A Optical Drive Bay: Optional DVD-ROM, or DVD-RW drive



Technical Specifications

System Unit	Dimensions (H x W x D)	8 SFF	1.7 x 17.11 x 27.5 inches (4.32 x 43.46 x 69.90 cm)
		4 LFF	1.7 x 17.11 x 29.5 inches (4.32 x 43.46 x 75.0 cm)
	Weight (approximate)	Maximum (all hard drives, power supply, and processor installed)	8 SFF/4 LFF - 16.2/16.8 kg, 35.7/37.0 lb
		Minimum (one hard drive, power supply, and processor installed)	8 SFF/4 LFF - 10.9/11.9 kg, 24.0/26.2 lb
	Input Requirements (HP ProLiant 350 W power supply)	Rated Line Voltage	100 to 120 VAC
		Rated Input Current	6 Amps (at 100VAC) to 3 Amps (at 200 VAC)
		Rated Input Frequency	50 to 60 Hz
	Power Supply Output (per power supply)	Rated Steady-State Power	350 W (at 100 to 120 VAC), 350 W (at 200 to 240 VAC)
		Maximum Peak Power	400 W (at 100 to 120 VAC), 400 W (at 200 to 240 VAC)
	System Inlet Temperature	Operating	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 304.8 m (1.8°F per every 1000 ft) above sea level to a maximum of 3048 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F).
		Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
	Relative Humidity (non-condensing)	Operating	10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non- condensing.
		Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non- condensing.
	Altitude	Operating	3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
		Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Acoustic Noise	Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance	



Technical Specification	ons				
		with ISO 9296 (ECMA 109).			
		Idle (Note 1)			
			LWAd	5.0 B	
			LpAm	35 dB Average Bystander	
		Operating			
			LWAd	5.1 B	
			LpAm	35 dB Average Bystander	
	NOTE: Values are subject to change without notification and are for reference only.				
		NOTE: Performance of system, options, and ancillary equipment will vary			
			depending on the system configuration. NOTE: Levels presented do not account for non-Hewlett-Packard installed		
		hardware.	esenteu u	o not account for non-newlett i ackara installed	
	Emissions Classification	FCC Rating		Class A	
	(EMC)	Normative Stand	lards	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1	
			NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.		
HP Dynamic Smart Array	Dimensions	Embedded			
B120i Controller	Disk Drive Interface - Transfer rate	Up to 6Gb/s SATA (Serial ATA)			
	SATA Connectors	6 internal connectors w/hot plug support			
	Server Interface	PCIe 2.0			
	SATA Speed	6Gb/s SATA links	5		
	Logical Drives Supported	Zero Memory, Up to 2 logical volumes (6 physical drives)			
	Host Memory Addressing	64-bit, supporting greater than 4GB server memory space			
	Hot Plug Support	Yes			
	RAID Support	RAID 0 (Striping), RAID 1 (Mirroring)			
		RAID 1+0 (Striping & Mirroring)			
		NOTE: 512 MB cache is required to enable RAID 5 support.			
		NOTE: NO SAS su	upported.		



Technical Specifications

HP Ethernet 1Gb 2-port 330i Adapter	Compatibility Data Transfer Method Controller Network Transfer Rate	IEEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX PCI Express, four lanes (x8) BCM5717 10Base-T (Half-Duplex) 10Base-T (Full-Duplex) 100Base-TX (Half-Duplex) 100Base-TX (Half-Duplex) 1000Base-TX (Half and Full-Duplex)
	Connector	RJ-45
	Cable Support	10Base-T
		100Base-TX 1000BaseTX
Environment-friendly Products and Approach	End-of-life Management and Recycling	Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.
		The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2013 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice. Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. AMD, the AMD Arrow logo, AMD Opteron[™], and combinations thereof, are trademarks of Advanced Micro Devices, Inc.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

